
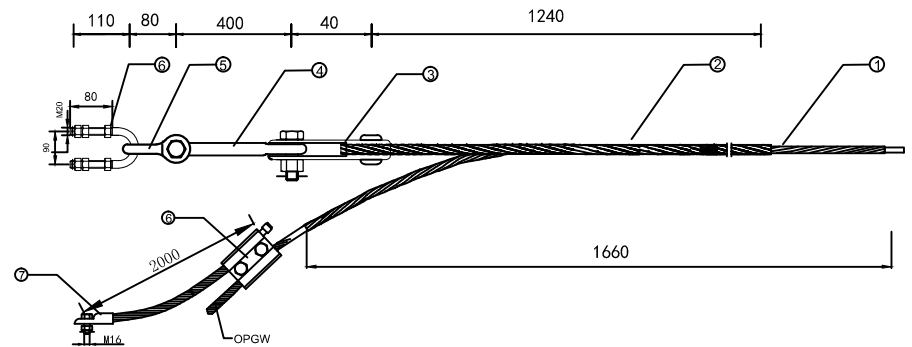



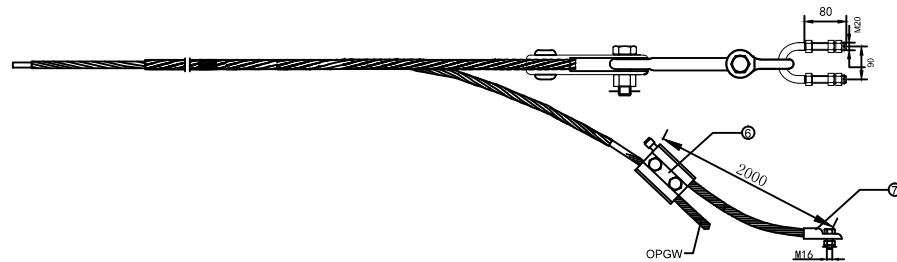


NOTE:

- 1.For OPGW-48B1-100[59;96.4];Ø13.9.RTS=59.4KN;
2. Range of diameter of cable dia.:12.9-14.1mm;
- 3.Grip strength:95%RTS;
- 4.All ferrous parts are hot-dip galvanized;
- 5.All dimensions are in millimeters;
- 6.Applicable standard.(ISO 1461 IS 2486/IEC:61284).

8	2	GROUND WIRE	JDX95-2000	AL ALLOY	/
7	2	GROOVE CLAMP	JB-2	AL ALLOY	/
6	2	U-BOLTS	U-2090	GALV.STEEL	70kN
5	2	U-SHACKLE	UK-0770	GALV.STEEL	70kN
4	2	EXTENSION RODS	YL-1040	GALV.STEEL	70kN
3	2	THIMBLE	TC-7	GALV.STEEL	70kN
2	2	OUTER PREFORMED	ONY1410 70-W	AL CLAD STEEL	70kN
1	2	INNER PREFORMED	ONY1410 70-N	AL CLAD STEEL	70kN
ITEM	Q'TY	DESCRIPTION	TYPE	MATERIAL	Failure load

Nantong Hongzhi Communication Equipment Co., LTD					
Tolerance			Tension Set ZOS TYPE:ONY1410 70		
≤30mm	±1.5mm				
>30mm	±5%				
MAX.	±5mm				
DRAWING		L.Z.G	DATE:2018-02-01	DRAWING NO.	Version
VERIFY		ZH.J		ONY1410 70-01	A
RATIFICATION		ZH.J			

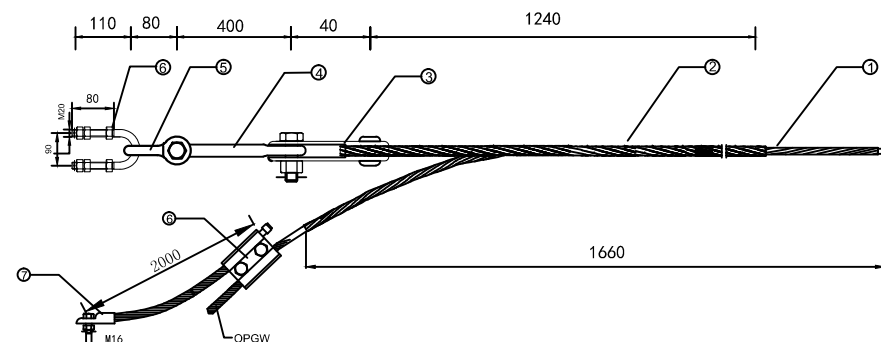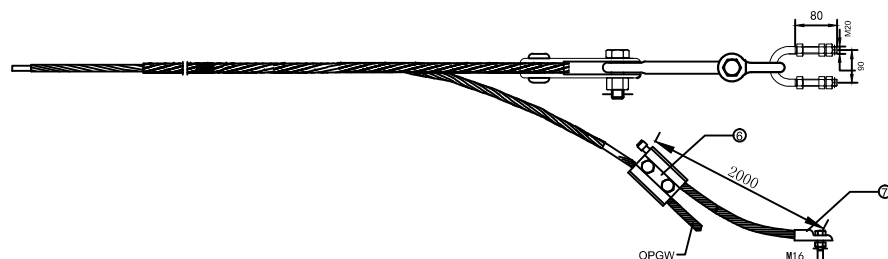


NOTE:

1. For OPGW-48B1-100[59;96.4];Ø13.9.RTS=59.4kN;
2. Range of diameter of cable dia.:12.9-14.1mm;
- 3.Grip strength:95%RTS;
- 4.All ferrous parts are hot-dip galvanized;
- 5.All dimensions are in millimeters;
- 6.Applicable standard.(ISO 1461 IS 2486/IEC:61284).

8	2	GROUND WIRE	JDX95-2000	AL ALLOY	/
7	2	GROOVE CLAMP	JB-2	AL ALLOY	/
6	2	U-BOLTS	U-2090	GALV.STEEL	70kN
5	2	U-SHACKLE	UK-0770	GALV.STEEL	70kN
4	2	EXTENSION RODS	YL-1040	GALV.STEEL	70kN
3	2	THIMBLE	TC-7	GALV.STEEL	70kN
2	2	OUTER PREFORMED	ONY1410 70-W	AL CLAD STEEL	70kN
1	2	INNER PREFORMED	ONY1410 70-N	AL CLAD STEEL	70kN
ITEM	Q'TY	DESCRIPTION	TYPE	MATERIAL	Failure load

Nantong Hongzhi Communication Equipment Co., LTD

Tolerance			Tension Set ZOSa TYPE:ONY1410 70		
≤30mm	±1.5mm				
> 30mm	±5%				
MAX.	±5mm				
DRAWING		L.Z.G	DATE:2018-02-01	DRAWING NO.	Version
VERIFY		ZH.J		ONY1410 70-01	A
RATIFICATION		ZH.J			

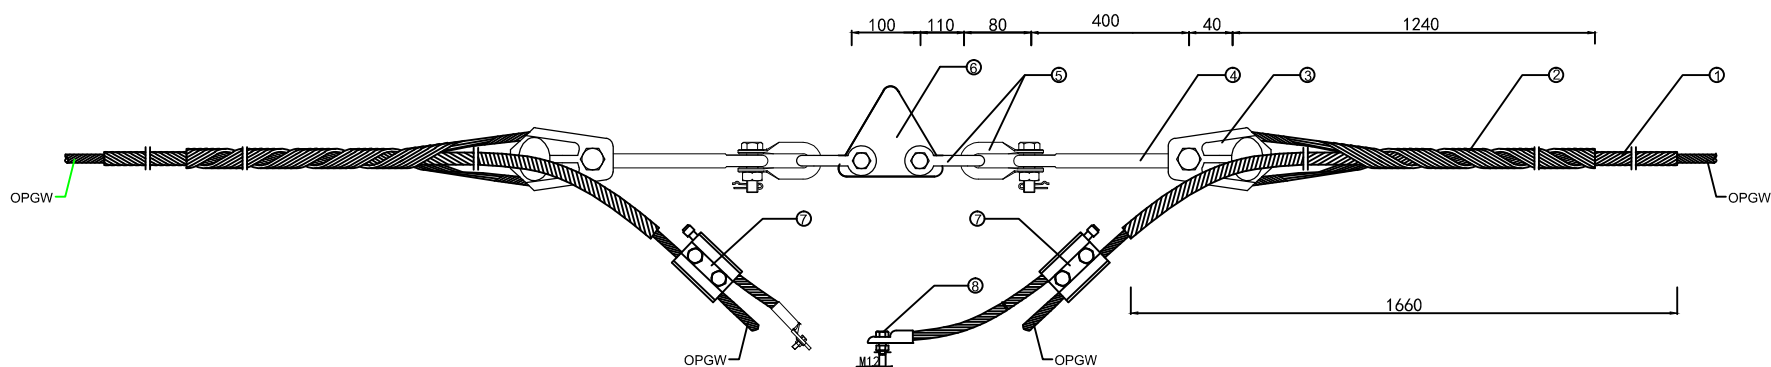

NOTE:

1. For OPGW-48B1-100[59;96.4];Ø13.9.RTS=59.4KN;
2. Range of diameter of cable dia.:12.9-14.1mm;
- 3.Grip strength:95%RTS;
- 4.All ferrous parts are hot-dip galvanized;
- 5.All dimensions are in millimeters;
- 6.Applicable standard.(ISO 1461 IS 2486/IEC:61284).

8	2	GROUND WIRE	JDX95-2000	AL ALLOY	/
7	2	GROOVE CLAMP	JB-2	AL ALLOY	/
6	1	TRIANGLE YOKE PLATES	LV-1012	GALV.STEEL	70kN
5	2	SHACKLE	U-7	GALV.STEEL	70kN
4	2	EXTENSION RODS	YL-1040	GALV.STEEL	70kN
3	2	THIMBLE	TC-7	GALV.STEEL	70kN
2	2	OUTER PREFORMED	ONY1410 70-W	AL CLAD STEEL	70kN
1	2	INNER PREFORMED	ONY1410 70-N	AL CLAD STEEL	70kN
ITEM	Q'TY	DESCRIPTION	TYPE	MATERIAL	Failure load

Nantong Hongzhi Communication Equipment Co., LTD

Tolerance			Tension Set ZOS2 TYPE:ONY1410 70		
≤30mm	±1.5mm				
>30mm	±5%				
MAX.	±5mm				
DRAWING		L.Z.G	DATE:2018-02-01	DRAWING NO.	Version
VERIFY		ZH.J		ONY1410 70-01	A
RATIFICATION		ZH.J			